


DLE-1 ARRANCADOR DIRECTO




DLE1-D Magnetic Starter

Application

DLE1-D magnetic starter is mainly applied to circuit of AC 50 or 60Hz, voltage up to 550V for far distance making and breaking circuit and frequently starting and controlling motor. It has the features of small volume, light weight, low power consumption, high efficiency, safe and reliable performance etc.

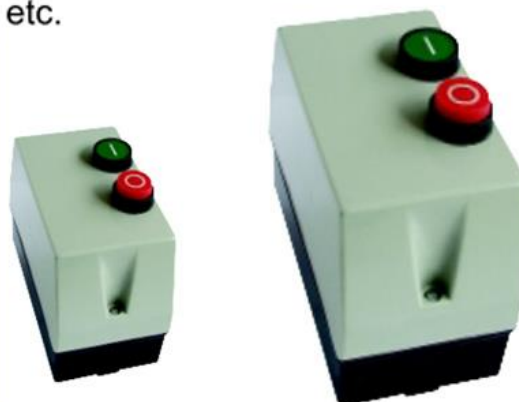

Dimensions

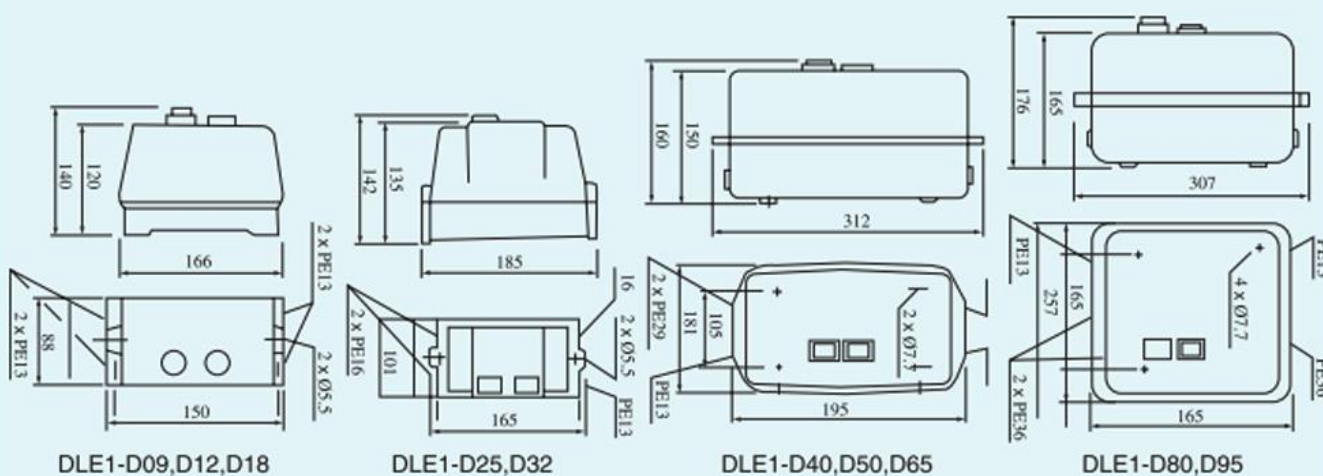

DLE-1 ARRANCADOR DIRECTO



Specifications

Maximum power AC3 duty(KW)						Rated current (A)	Type of enclosure	Code number		Suitable thermal relay (A)
220V 230V	380V 400V	415V	440V	500V	660V 690V			LL (long life)	NL(3) (normal life)	
2.2	4	4	4	5.5	5.5	9	IP42 IP65	DLE1-D094.. DLE1-D093..	– –	DLR2-D1312 DLR2-D1314
3	5.5	5.5	5.5	7.5	7.5	12	IP42 IP55	DLE1-D124.. DLE1-D123..	DLE1-D094.. DLE1-D093..	DLR2-D1316
4	7.5	9	9	10	10	18	IP42 IP55	DLE1-D188.. DLE1-D185..	DLE1-D124.. DLE1-D123..	DLR2-D1321
5.5	11	11	11	5	15	25	IP42 IP55	DLE1-D258.. DLE1-D255..	DLE1-D188.. DLE1-D185..	DLR2-D1322 DLR2-D2353
7.5	15	15	15	18.5	18.5	32	IP55	DLE1-D325..	DLE1-D255..	DLR2-D2355
11	18.5	22	22	22	30	40	IP55	DLE1-D405..	DLE1-D325..	DLR2-D3353 DLR2-D3355
15	22	25	30	30	33	50	IP55	DLE1-D505..	DLE1-D405..	DLR2-D3357 DLR2-D3359
18.5	30	37	37	37	37	65	IP55	DLE1-D655..	DLE1-D505..	DLR2-D3361
22	37	45	45	55	45	80	IP55	DLE1-D805..	DLE1-D655..	DLR2-D3363 DLR2-D3365
25	45	45	45	55	45	95	IP55	DLE1-D955..	DLE1-D805..	DLR2-D3365

Standard control circuit voltages

Volts	24	42	48	110	220/230	230	240	380/400	400	415	440
50/60Hz	B7	D7	E7	F7	M7	P7	U7	Q7	V7	N7	R7