



CMR 十字开关 Monolever Switch

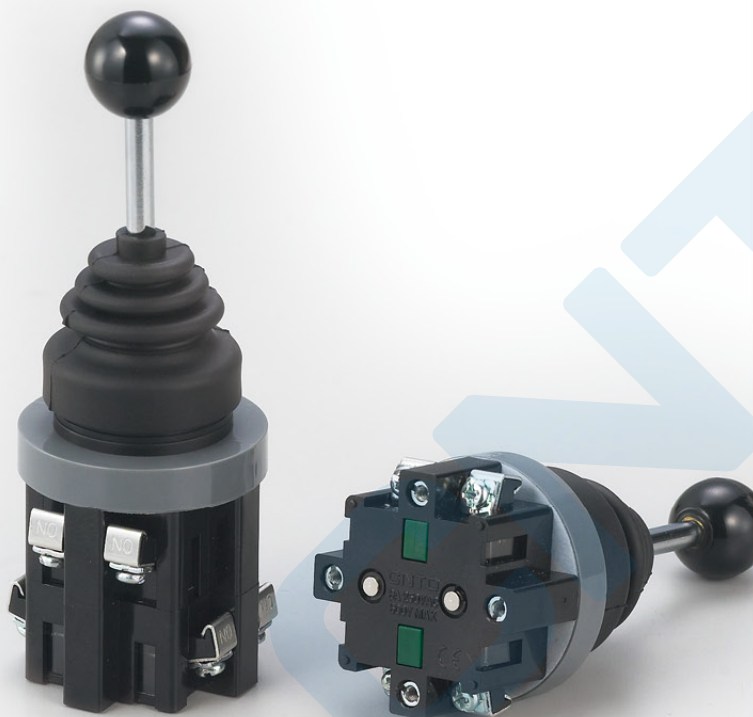

特点Features

- 上、下、左、右四方向操作顺畅，具可任意选择一向、二向、三向、或四向
- 有保持、复位、无动作等三种操作方式
- 接点座有2a(BR-1),1a1b(BR-2),2b(BE-3)。如下图可自由选择方向与接点之组合
- 具耐油、防水和防压结构
- You can smoothly and swiftly handle the lever in four directions upward, rightward, downward, and leftward
- Three alternatives of movement are attainable in each direction: Go-on, auto-return, and blockade-enforcing
- You are free, as you like, to operate in four, three, or two directions with the switch
- Rubber bushing is water-proof, oil-resistant, and dustpreventive



型号说明 Models Designations



项目 Items	代号 Code	说明 Description
① 型式 Type	CMR	圆型 Round type
	CMS	方型 Square type
	CMRS	圆型 Round type
	CMRN	密封圆型Seal Round
② 固定孔径 Mounting Hole	30	Φ30mm only
③ 接点座数目 No.of contact Blocks fitted	1~4	1~4
④ 操作方式 Actuating keys	1	保持 Go-on
	2	复位 Auto-return
	0	无动作 Blockade-enforcing
⑤ 接点排列型式 Type of contact Blocks fitted	00	None
	10	1a(1NO)
	20	2a(2NO)
	01	1b(1NC)
	02	2b(2NC)
	11	1a1b(1NO-1NC)


Note: When you place order, please kindly designate clockwise the movement way and type of contact fitted.

额定值 Ratings


交流AC	额定电压 Rated voltage		110V	220V	440V
	额定电流 Rated current		10A	6A	3A
	开断电流 Breaking current capacity		50A	30A	10A
直流DC	电阻性负载 Resistance Load	额定电压 Rated voltage	110V	220V	600V
		额定电流 Rated Current	2.2A	1.1A	0.4A
		开断电流 Breaking Current	2.42A	1.21A	0.44A
	电感性负载 Inductive Load	额定电流 Rated Current	1.2A	0.45A	0.2A
		开断电流 Breaking Current	1.32A	0.5A	0.22A

外观和尺寸 Appearance and Dimension


CMR-301

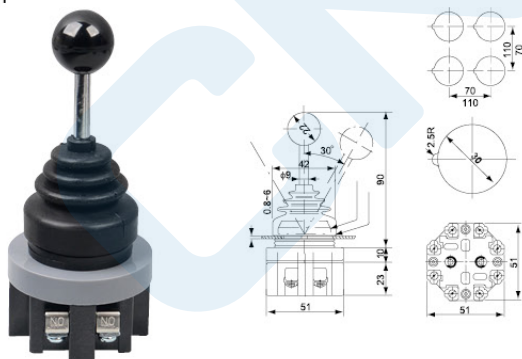


CMRN-301

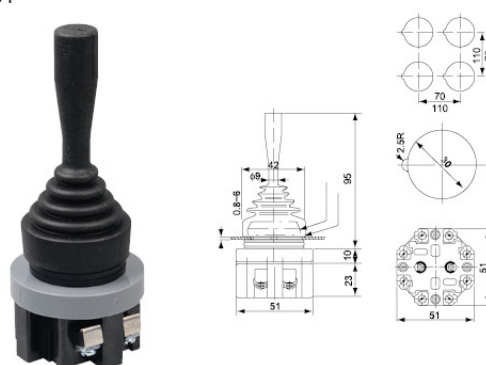


CMR-302

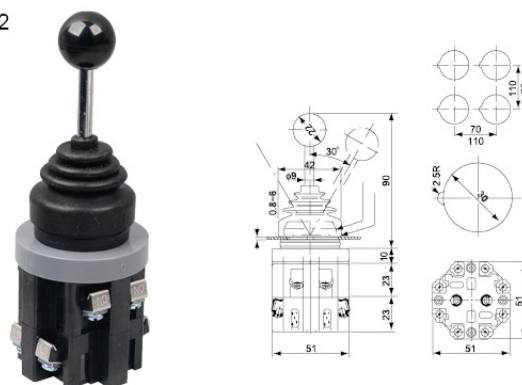

CMRN-302

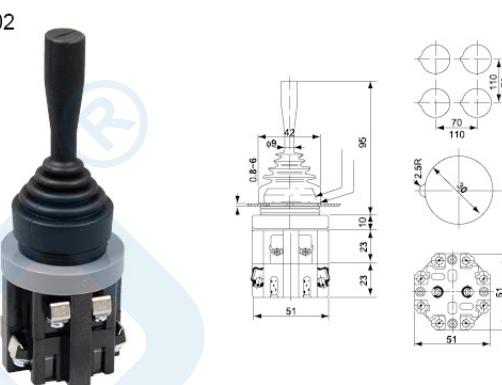

CMRS-304

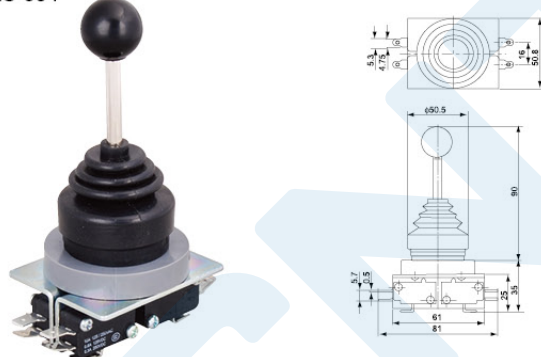

CMRSN-304

