



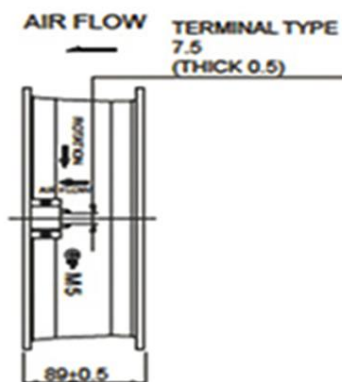

LED CONTROLS
S. A. DE C. V.

señalización
control
automatización

CARAVEL

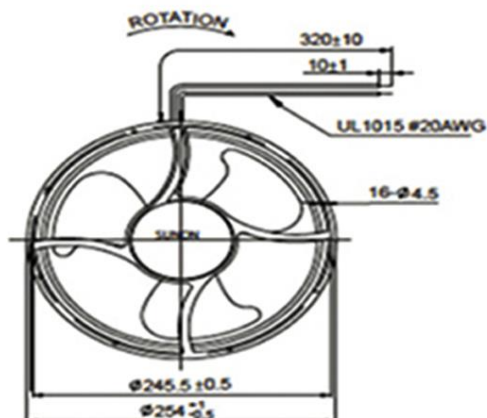

Size: 254mm x 89mm

Airflow: 440 ~ 880m³/hr

400 - 500 CFM

Weight: 2208g

Noise: 50~70 dBA



Impeller: PBT Thermoplastic Black, UL94-VO

Frame: Aluminum Alloy

Lead Wire: AWG#22 UL 1007 (Optional)

Motor: Capacitor-Run Induction Motor

Operation Temperature: -10°C~+70°C

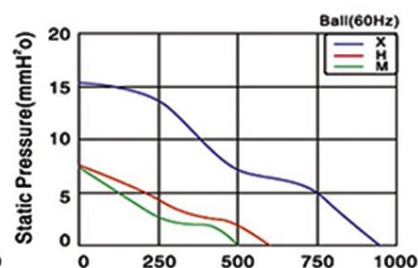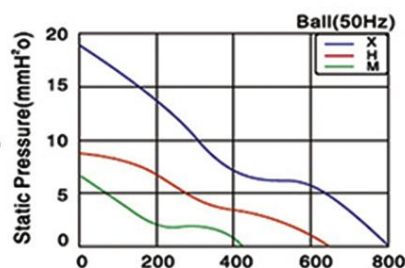

Model	Voltage VAC	Freq. Hz	Current: A	Power W	Speed RPM	Noise dBA	Air Flow		Phase	Capacitor	
							M3/hr	CFM			
HB2509HA,BL-C	Ball	100/125	50/60	0.7/0.85	95/100	2500/2850	68/70	810/880	10/65	B	8/250
HB2509HA,BL-C		200/240	50/60	0.6/0.7	105/135	2500/2850	68/70	810/880	10/65	B	8/250
HB2509MA,BL-C		100/125	50/60	0.6/0.65	75/85	2100/1900	62/60	665/600	10/65	B	8/250
HB2509MA,BL-C		200/240	50/60	0.5/0.6	95/100	2100/1900	62/60	665/600	10/65	B	8/250
HB2509LA,BL-C		100/125	50/60	0.4/0.6	50/65	1400/1600	50/52	440/515	10/65	B	8/250
HB2509LA,BL-C		200/240	50/60	0.2/0.3	75/80	1400/1600	50/52	440/515	10/65	B	8/250