




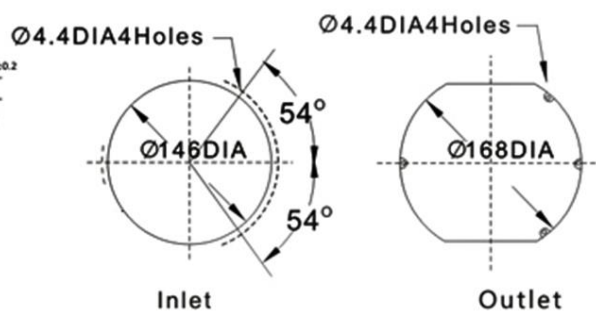

MAJOR

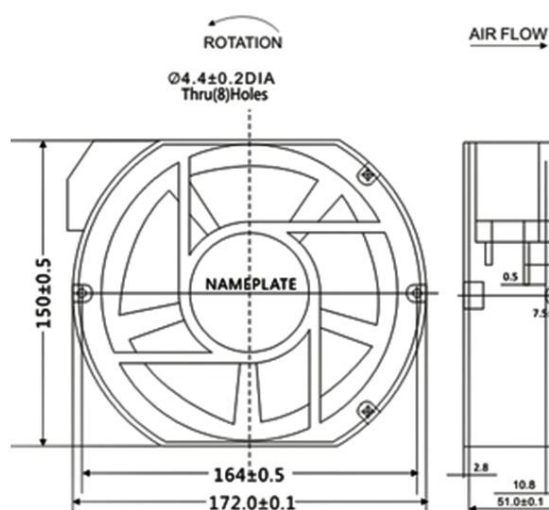

Size: 172mm x 150mm x 50mm
 Airflow: 272 ~ 316m³/hr
 160 - 178 CFM
 Weight: 840g
 Noise: 52~59 dBA
 Impeller: PBT Thermoplastic Black, UL94-VO
 Frame: Aluminum Alloy
 Terminals: 0.5mm
 Lead Wire: AWG#22 UL 1007 (Optional)
 Motor: Shaded Pole Induction Motor
 Operation Temperature: -10°C~+70°C

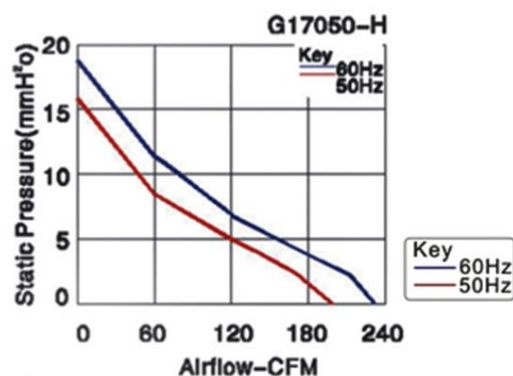

Model	Voltage VAC	Freq. Hz	Current: A	Power W	Speed RPM	Noise dBA	Air Flow		Phase	Capacitor
							M3/hr	CFM		
HB17050HA,B(S)	100~125	50/60	0.43/0.40	26/28	2650/2950	54/59	272/316	160/178	1	/
HB17050HA,B(S)	200~240	50/60	0.23/0.20	26/28	2650/2950	54/59	272/316	160/178	1	/
HB17050HA,B(S)	380	50/60	0.13/0.11	26/28	2650/2950	54/59	272/316	160/178	1	/