

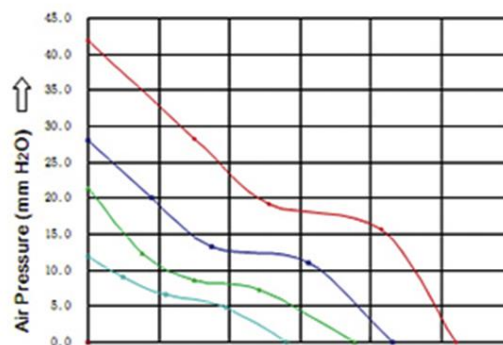






MUFFIN

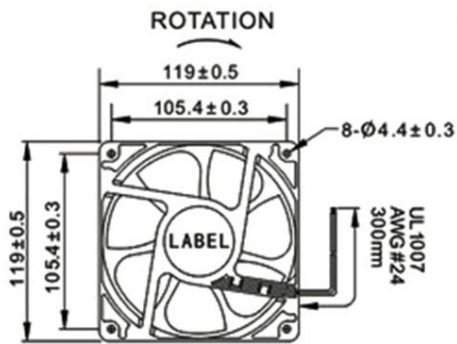

Inlet

Outlet

Model	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	B.S	VDC	VDC	Amp	Watt	RPM	CFM	m ³ /min	Inch-H ₂ O	Pa	dB-A	g
HB12038#12U	B.S	12	7.0~13.8	1.50	18.00	4000	165.05	4.67	0.60	150.63	58.0	262.0
HB12038#12H	B.S	12	7.0~13.8	1.00	12.00	3500	144.21	4.08	0.50	124.25	53.0	262.0
HB12038#12M	B.S	12	7.0~13.8	0.60	7.20	3000	115.29	3.27	0.34	83.55	48.0	262.0
HB12038#12L	B.S	12	7.0~13.8	0.40	4.80	2500	101.85	2.88	0.26	64.63	40.0	262.0
HB12038#24U	B.S	24	14.0~27.6	1.00	24.00	4000	165.05	4.67	0.60	150.63	58.0	262.0
HB12038#24H	B.S	24	14.0~27.6	0.60	14.40	3500	144.21	4.08	0.50	124.25	53.0	262.0
HB12038#24M	B.S	24	14.0~27.6	0.40	9.60	3000	115.29	3.27	0.34	83.55	48.0	262.0
HB12038#24L	B.S	24	14.0~27.6	0.20	4.80	2500	101.85	2.88	0.26	64.63	40.0	262.0