




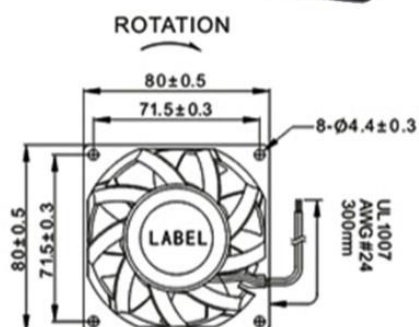

SPRITE



AIR FLOW




Bearing Type: Sleeve Bearing & Ball Bearing

Material: Impeller & Frame, Plastic (UL94V-0)

Lead Wire: UL Type

Operation Temperature: -10 °C-70°C, 35%-85%RH

Storage Temperature: -40°C-80°C, 35%-85%RH

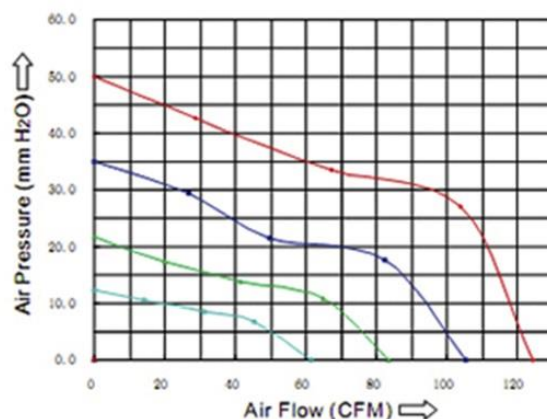

Inlet

Outlet

Model	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	B	VDC	VDC	Amp	Watt	RPM	CFM	m ³ /min	Inch-H ₂ O	Pa	dB-A	g
HB08038#12U	B	12	7.0~13.8	1.50	18.00	6500	90.60	2.57	0.99	245.56	59.0	153.0
HB08038#12H	B	12	7.0~13.8	0.90	10.80	5500	74.46	2.11	0.68	168.48	53.0	153.0
HB08038#12M	B	12	7.0~13.8	0.60	7.20	4500	60.08	1.70	0.46	114.74	47.0	153.0
HB08038#12L	B	12	7.0~13.8	0.40	4.80	3500	45.11	1.28	0.26	65.70	43.0	153.0
HB08038#24U	B	24	14.0~27.6	0.80	19.20	6500	90.60	2.57	0.99	245.56	59.0	153.0
HB08038#24H	B	24	14.0~27.6	0.50	12.00	5500	74.46	2.11	0.68	168.48	53.0	153.0
HB08038#24M	B	24	14.0~27.6	0.30	7.20	4500	60.08	1.70	0.46	114.74	47.0	153.0
HB08038#24L	B	24	14.0~27.6	0.20	4.80	3500	45.11	1.28	0.26	65.70	43.0	153.0