

Pendant stations

DC30 series pendant stations for power circuits

IP65 ☐ direct switching



TECHNO-CONTROL EQUIPMENT

2 directions
mechanically interlocked

ENGRAVING



DESCRIPTION

For 2-speed motor
direct control
No. 1 Emergency stop
ø 30 turn to release
EN418 with 3NC
contacts and:

2NO+2NC
Contact block


REFERENCE NO.

DC30D2

WEIGHT gr


650

DIMENSIONS

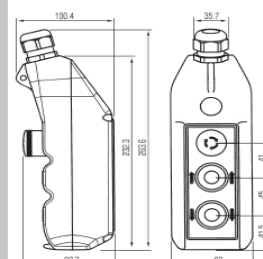


WIRING DIAGRAMS - POWER CIRCUITS

For single-speed reversing motors
30205085 (3NO+1NC) contact block

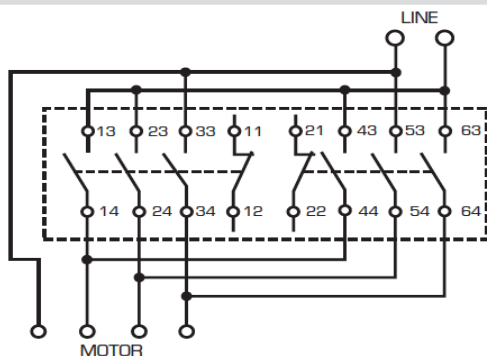


For single-speed reversing motors
30205087 (4NO) contact block


SINGLE-PHASE

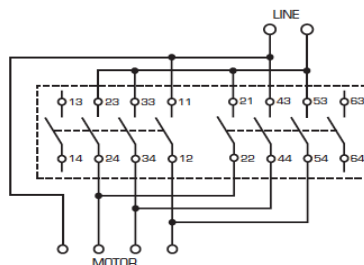

TWO-PHASE

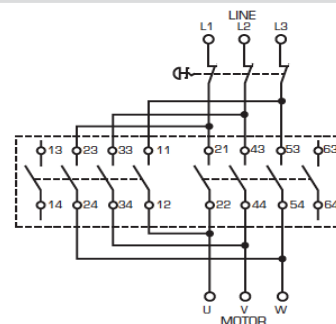


For two-speed reversing motors
30205086 contact block

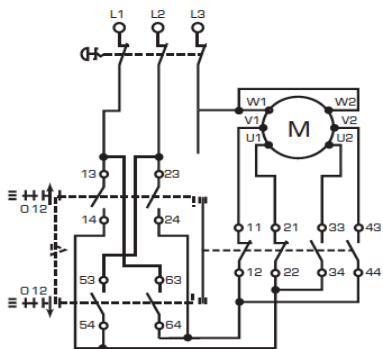


AUXILIARY CIRCUIT WIRING DIAGRAM


SINGLE-SPEED



FAST MOVEMENT



TWO-SPEED



EMERGENCY

