

Series of Heavy Duty Connectors



technical characteristics

技术特性

technical characteristics



测试和控制过程依据DIN IEC 60512-3
Control and test procedures according to DIN IEC 60512-3

电流负载能力


Current carrying capacity

电流负载能力所受的限制主要来自包含接插针的接插体可承受的最大温度
The current carrying is limited by maximum temperature of materials for inserts and contacts including terminals

规范/Specifications

DIN VDE 0627
DIN VDE 0110
DIN EN 61984

插接体/Inserts	
接插件针数/Number of contacts	6,10,16,24,32(2x16) 48(2x24)+PE 06,12(2x06)+PE
工作电流/working current (见负载图/see current carrying capacity)	16A, 32A
工作电压/ working voltage	500V
污染等级/Pollution degree	3
额定脉冲耐受电压/Rated impulse voltage	6KV
绝缘电阻/Insulation resistance	$\geq 10^{10} \Omega$
材料/Material	Polycarbonate
工作温度范围/Temperature range	-40℃...+125℃
阻燃等级 (UL94) / Flammability acc.to UL94	V0
据UL/CSA工作电压/working voltage acc.to UL/CSA	600V
可拔插次数/Mechanical working life(mating cycles)	≥ 500

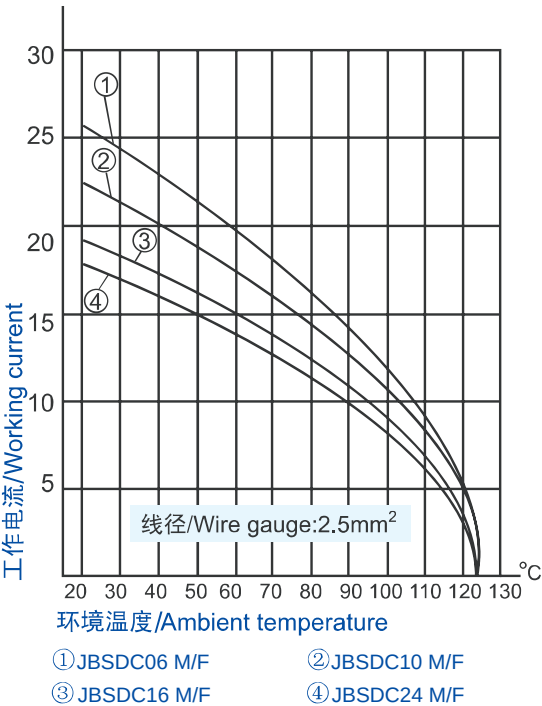


接插针/Contacts

材料/Material	铜/Copper alloy
表面处理/Surface	镀银/silver-plated
接触电阻/Contact resistance	$\leq 1m \Omega$
接线形式/Terminal	
螺钉压接/Screw terminal	
导线规格/Wire gauge	1.0-2.5mm ² AWG 18-14
螺钉拧紧力矩/Screw terminal tightening	0.5Nm
剥线长度/Stripping length	7.0mm
冷压连接/Crimp terminal	
导线规格/Wire gauge	0. 14-4. 0 mm ² AWG 26-12
剥线长度/Stripping length	7.5mm

JBSDC5 4 + ⊕ 500V/10A
插芯/Insert

螺丝连接/Screw connection

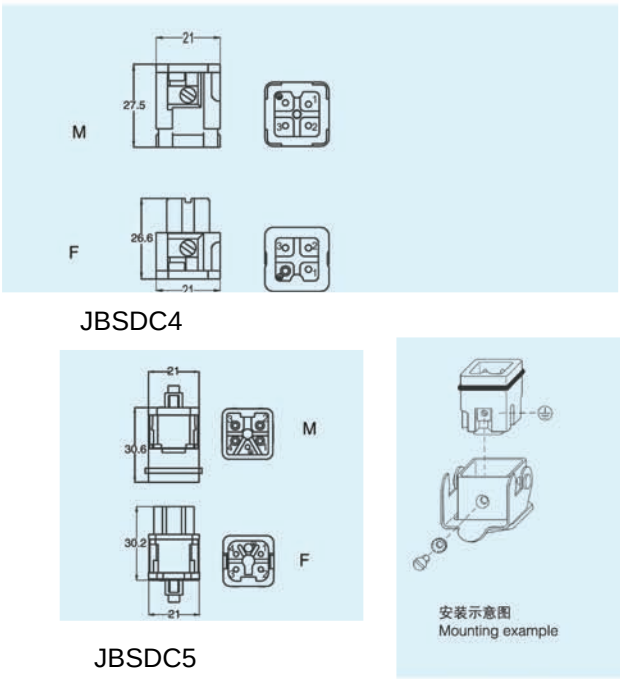

2耳上壳、1扣下壳/Hoods with 2bolts & Housings with 1lever

上壳 Hood	螺纹 Thread	订货号 Order No.
------------	--------------	------------------



M20 JBSDC5H-SE-2B-M20
PG13.5 JBSDC5H-SE-2B-PG13.5




M20 JBSDC5H-TE-2B-M20
PG13.5 JBSDC5H-TE-2B-PG13.5

下壳 Housing	螺纹 Thread	订货号 Order No.
---------------	--------------	------------------




JBSDC5B-OB-1L

(带密封垫)
With sealing



(带密封垫)
With sealing



(带密封垫)
With sealing








JBSDC6M JBSDC6F



JBSDC6SM JBSDC6M

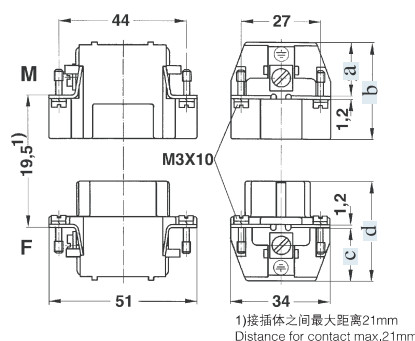


	a	b	c	d
M/F	18	33	18	35
SM/SF	19	34	19	36



接插针排序
Contacts arrangement view
from termination side

面板安装开孔图
Panel cut out for inserts
for use without Hoods/housing

上壳 Hood	螺纹 Thread	订货号 Order No.
------------	--------------	------------------




M20	JBSDC6H-SE-M20
PG13.5	JBSDC6H-SE-PG13.5




螺纹	订货号
Thread	Order No.

M20	JBSDC6H-SE-M20
PG13.5	JBSDC6H-SE-PG13.5

下壳 Housing	螺纹 Thread	订货号 Order No.
---------------	--------------	------------------



无盖/Without Cover
JBSDC6B-OB-1L
带塑料盖/With plastic Cover¹⁾
JBSDC6B-OB-1L-C



无盖/Without Cover

M20	JBSDC6B-CB-1L-M20
2M20	JBSDC6B-CB-1L-2M20
M20	JBSDC6B-CB-1L-M20
2M20	JBSDC6B-CB-1L-2M20

帶塑料盖/With plastic Cover¹⁾

M20	JBSDC6B-CB-1L-C-M20
2M20	JBSDC6B-CB-1L-C-2M20
M20	JBSDC6B-CB-1L-C-M20
2M20	JBSDC6B-CB-1L-C-2M20

下壳 Housing	螺纹 Thread	订货号 Order No.
---------------	--------------	------------------



M20	JBSDC6B-TE-M20
PG13.5	JBSDC6B-TE-PG13.5

螺丝连接/Screw connection




JBSDC10F

冷压连接/Crimp connection





JBSDC10SM

JBSDC10SM

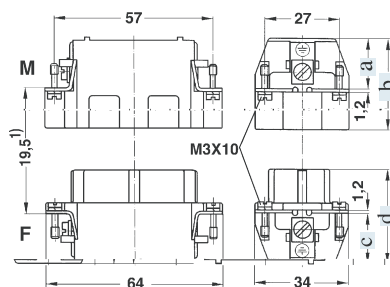

	a	b	c	d
M/F	18	33	18	35
SM/SF	19	34	19	36




1)接插体之间最大距离21mm
Distance for contact max,21mm

接插针排序
Contacts arrangement view
from termination side

面板安装开孔图
Panel cut out for inserts
for use without Hoods/housings


2耳上壳、1扣下壳/Hoods with 2bolts & Housings with 1lever

上壳 Hood	螺纹 Thread	订货号 Order No.
	M20	JBSDC10H-SE-2B-M20
	PG16	JBSDC10H-SE-2B-PG16



4耳上壳、2扣下壳/Hoods with 4bolts & Housings with 2levers

上壳 Hood	螺纹 Thread	订货号 Order No.
	M20	JBSDC10H-SE-4B-M20
	PG16	JBSDC10H-SE-4B-PG16




2扣上壳、4耳下壳/Hoods with 2levers & Housings with 4bolts

上壳 Hood	螺纹 Thread	订货号 Order No.
	M20	JBSDC10H-SE-2L-M20
	PG16	JBSDC10H-SE-2L-PG16



M20	JBSDC10H-TE-2B-M20
PG16	JBSDC10H-TE-2B-PG16




M20	JBSDC10H-TE-4B-M20
PG16	JBSDC10H-TE-4B-PG16




M20	JBSDC10H-TE-2L-M20
PG16	JBSDC10H-TE-2L-PG16

下壳 Housing	螺纹 Thread	订货号 Order No.
---------------	--------------	------------------



无盖/Without Cover
JBSDC10B-OB-1L
带塑料盖/With plastic Cover¹⁾
JBSDC10B-OB-1L-C



无盖 / Without Cover

M20	JBSDC10B-CB-1L-M20
2M20	JBSDC10B-CB-1L-2M20
M25	JBSDC10B-CB-1L-M25
PG16	JBSDC10B-CB-1L-PG16
2PG16	JBSDC10B-CB-1L-2PG16


带塑料盖 / With plastic Cover¹⁾

M20	JBSDC10B-CB-1L-C-M20
2M20	JBSDC10B-CB-1L-C-2M20
M25	JBSDC10B-CB-1L-C-M25
PG16	JBSDC10B-CB-1L-C-PG16
2PG16	JBSDC10B-CB-1L-C-2PG16


下壳 Housing	螺纹 Thread	订货号 Order No.
---------------	--------------	------------------



JBSDC10B-OB-2L



M20	JBSDC10B-CB-2L-M20
2M20	JBSDC10B-CB-2L-2M20
M25	JBSDC10B-CB-2L-M25
PG16	JBSDC10B-CB-2L-PG16
2PG16	JBSDC10B-CB-2L-2PG16




M20 JBSDC10B-TE-2L-C-M20
PG16 JBSDC10B-TE-2L-C-PG16

下壳 Housing	螺纹 Thread	订货号 Order No.
---------------	--------------	------------------



无盖/Without Cover
JBSDC10B-OB-4B
带塑料盖/With plastic Cover¹⁾
JBSDC10B-OB-4B-C




无盖/Without Cover

M20	JBSDC10B-CB-4B-M20
2M20	JBSDC10B-CB-4B-2M20
M25	JBSDC10B-CB-4B-M25
PG16	JBSDC10B-CB-4B-PG16
2PG16	JBSDC10B-CB-4B-2PG16

带塑料盖/With plastic Cover¹

M20	JBSDC10B-CB-4B-C-M20
2M20	JBSDC10B-CB-4B-C-2M20
M25	JBSDC10B-CB-4B-C-M25
PG16	JBSDC10B-CB-4B-C-PG16
2PG16	JBSDC10B-CB-4B-C-2PG16




M20 JBSDC10B-TE-1L-C-M20
PG16 JBSDC10B-TE-1L-C-PG16

插芯/Insert




Technical drawing of the M3X10 cable gland. The drawing includes three views: a front view (top), a side view (bottom), and a top view (right). Dimensions are provided in millimeters (mm). The front view shows a width of 77.5 mm and a height of 19.5 mm. The side view shows a width of 84.5 mm. The top view shows a width of 27 mm, a height of 1.2 mm, and a diameter of 34 mm. The drawing also indicates a mounting hole diameter of M3X10.


	a	b	c	d
M/F	18	33	18	35
SM/SF	19	34	19	36




上壳 Hood	螺纹 Thread	订货号 Order No.
------------	--------------	------------------




上壳 Hood	螺纹 Thread	订货号 Order No.
------------	--------------	------------------




上壳 Hood	螺纹 Thread	订货号 Order No.
------------	--------------	------------------



下壳 Housing	螺纹 Thread	订货号 Order No.
---------------	--------------	------------------




下壳 Housing	螺纹 Thread	订货号 Order No.
---------------	--------------	------------------



下壳 Housing	螺纹 Thread	订货号 Order No.
---------------	--------------	------------------




	无盖/Without Cover	
	M25	JBSDC16B-CB-1L-M25
	M2M5	JBSDC16B-CB-1L-2M25
	PG21	JBSDC16B-CB-1L-PG21
	2PG21	JBSDC16B-CB-1L-2PG21
	带塑料盖/With plastic Cover ¹⁾	
	M25	JBSDC16B-CB-1L-C-M25
	M2M5	JBSDC16B-CB-1L-C-2M25
	PG21	JBSDC16B-CB-1L-C-PG21
	2PG21	JBSDC16B-CB-1L-C-2PG21



无盖/Without Cover	
M25	JBSDC16B-CB-1L-M25
2M25	JBSDC16B-CB-1L-2M25
PG21	JBSDC16B-CB-1L-PG21
2PG21	JBSDC16B-CB-1L-2PG21
带塑料盖/With plastic Cover ¹⁾	
M25	JBSDC16B-CB-1L-C-M25
2M25	JBSDC16B-CB-1L-C-2M25
PG21	JBSDC16B-CB-1L-C-PG21
2PG21	JBSDC16B-CB-1L-C-2PG21



M25	JBSDC16B-CB-2L-M25
2M25	JBSDC16B-CB-2L-2M25
PG21	JBSDC16B-CB-2L-PG21
2PG21	JBSDC16B-CB-2L-2PG21




M25	JBSDC16B-CB-2L-M25
2M25	JBSDC16B-CB-2L-2M25
PG21	JBSDC16B-CB-2L-PG21
2PG21	JBSDC16B-CB-2L-2PG21

无盖 / Without Cover

M25	JBSDC16B-CB-4B-M25
2M25	JBSDC16B-CB-4B-2M25
PG21	JBSDC16B-CB-4B-PG21
2PG21	JBSDC16B-CB-4B-2PG21

带塑料盖 / With plastic Cover¹⁾

M25	JBSDC16B-CB-4B-C-M25
2M25	JBSDC16B-CB-4B-C-2M25
PG21	JBSDC16B-CB-4B-C-PG21
2PG21	JBSDC16B-CB-4B-C-2PG21



无盖/Without Cover	
M25	JBSDC16B-CB-4B-M25
2M25	JBSDC16B-CB-4B-2M25
PG21	JBSDC16B-CB-4B-PG21
2PG21	JBSDC16B-CB-4B-2PG21
带塑料盖/With plastic Cover ¹⁾	
M25	JBSDC16B-CB-4B-C-M25
2M25	JBSDC16B-CB-4B-C-2M25
PG21	JBSDC16B-CB-4B-C-PG21
2PG21	JBSDC16B-CB-4B-C-2PG21

M25	JBSDC16B-TE-2L-M25
PG21	JBSDC16B-TE-2L-PG21
PG29	JBSDC16B-TE-2L-PG29

500V/I6A JBSDC24 24+ ⚡

插芯/Insert

螺丝连接/Screw connection



JBSDC24M



JBSDC24F




JBSDC24SM




JBSDC24SF

冷压连接/Crimp connection

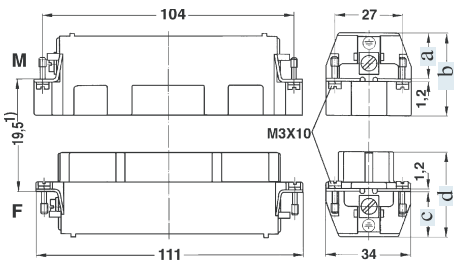


1) 接插体之间最大距离21mm
Distance for contact max:21mm

	a	b	c	d
M/F	18	33	18	35
SM/SF	19	34	19	36



接插针排序
Contacts arrangement view
from termination side



面板安装开孔图
Panel cut out for inserts
for use without Hoods/housings

2耳上壳、1扣下壳/Hoods with 2bolts & Housings with 1lever

上壳 Hood	螺纹 Thread	订货号 Order No.
	M25	JBSDC24H-SE-2B-M25
	M32	JBSDC24H-SE-2B-M32
	PG21	JBSDC24H-SE-2B-PG21
	PG29	JBSDC24H-SE-2B-PG29

4耳上壳、2扣下壳/Hoods with 4bolts & Housings with 2levers

上壳 Hood	螺纹 Thread	订货号 Order No.
	M25	JBSDC24H-SE-4B-M25
	M32	JBSDC24H-SE-4B-M32
	PG21	JBSDC24H-SE-4B-PG21
	PG29	JBSDC24H-SE-4B-PG29

2扣上壳、4耳下壳/Hoods with 2levers & Housings with 4bolts

上壳 Hood	螺纹 Thread	订货号 Order No.
	M25	JBSDC24H-SE-2L-M25
	M32	JBSDC24H-SE-2L-M32
	PG21	JBSDC24H-SE-2L-PG21
	PG29	JBSDC24H-SE-2L-PG29

	M25	JBSDC24H-TE-2B-M25
	PG21	JBSDC24H-TE-2B-PG21
	PG29	JBSDC24H-TE-2B-PG29

	M25	JBSDC24H-TE-4B-M25
	PG21	JBSDC24H-TE-4B-PG21
	PG29	JBSDC24H-TE-4B-PG29

	M25	JBSDC24H-TE-2L-M25
	PG21	JBSDC24H-TE-2L-PG21
	PG29	JBSDC24H-TE-2L-PG29

下壳 Housing	螺纹 Thread	订货号 Order No.
	无盖/Without Cover	JBSDC24B-OB-1L
	带塑料盖/With plastic Cover ¹⁾	JBSDC24B-OB-1L-C
	无盖/Without Cover	M25 JBSDC24B-CB-1L-M25
		2M25 JBSDC24B-CB-1L-2M25
		PG21 JBSDC24B-CB-1L-PG21
		2PG21 JBSDC24B-CB-1L-2PG21
	带塑料盖/With plastic Cover ¹⁾	M25 JBSDC24B-CB-1L-C-M25
		2M25 JBSDC24B-CB-1L-C-2M25
		PG21 JBSDC24B-CB-1L-C-PG21
		2PG21 JBSDC24B-CB-1L-C-2PG21

下壳 Housing	螺纹 Thread	订货号 Order No.
	无盖/Without Cover	JBSDC24B-OB-2L
	无盖/Without Cover	M25 JBSDC24B-CB-2L-M25
		2M25 JBSDC24B-CB-2L-2M25
		PG21 JBSDC24B-CB-2L-PG21
		2PG21 JBSDC24B-CB-2L-2PG21
	无盖/Without Cover	M25 JBSDC24B-TE-2L-M25
		PG21 JBSDC24B-TE-2L-PG21
		PG29 JBSDC24B-TE-2L-PG29

下壳 Housing	螺纹 Thread	订货号 Order No.
	无盖/Without Cover	JBSDC24B-OB-4B
	带塑料盖/With plastic Cover ¹⁾	JBSDC24B-OB-4B-C
	无盖/Without Cover	M25 JBSDC24B-CB-4B-M25
		2M25 JBSDC24B-CB-4B-2M25
		PG21 JBSDC24B-CB-4B-PG21
		2PG21 JBSDC24B-CB-4B-2PG21
	带塑料盖/With plastic Cover ¹⁾	M25 JBSDC24B-CB-4B-C-M25
		2M25 JBSDC24B-CB-4B-C-2M25
		PG21 JBSDC24B-CB-4B-C-PG21
		2PG21 JBSDC24B-CB-4B-C-2PG21

	M25	JBSDC24B-TE-1L-M25
	PG21	JBSDC24B-TE-1L-PG21
	PG29	JBSDC24B-TE-1L-PG29

插芯/Insert



JBSDC48M




JBSDC48F




JBSDC48SM




JBSDC48SF

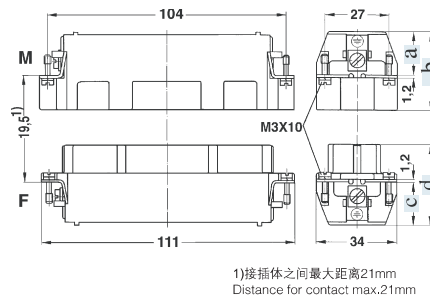

	a	b	c	d
M/F	18	33	18	35
SM/SF	19	34	19	36




接插针排序
Contacts arrangement view
from termination side



面板安装开孔图
Panel cut out for inserts
for use without Hoods/housings


上壳 Hood	螺纹 Thread	订货号 Order No.
------------	--------------	------------------




M32	JBSDC48H-SE-2B-M32
M40	JBSDC48H-SE-2B-M40
M50	JBSDC48H-SE-2B-M50
PG29	JBSDC48H-SE-2B-PG29
PG36	JBSDC48H-SE-2B-PG36



M32	JBSDC48H-TE-2B-M32
M40	JBSDC48H-TE-2B-M40
M50	JBSDC48H-TE-2B-M50
PG29	JBSDC48H-TE-2B-PG29
PG36	JBSDC48H-TE-2B-PG36




JBSDC48B-OB-2L



2M32	JBSDC48B-CB-2L-2M32
M40	JBSDC48B-CB-2L-M40
2M40	JBSDC48B-CB-2L-2M40
M50	JBSDC48B-CB-2L-M40
2M50	JBSDC48B-CB-2L-2M40
PG29	JBSDC48B-CB-2L-PG29
2PG29	JBSDC48B-CB-2L-2PG29
PG36	JBSDC48B-CB-2L-PG36
2PG36	JBSDC48B-CB-2L-2PG36



M32	JBSDC48B-TE-2L-M32
M40	JBSDC48B-TE-2L-M40
M50	JBSDC48B-TE-2L-M50
PG29	JBSDC48B-TE-2L-PG29
PG36	JBSDC48B-TE-2L-PG36



下壳
Housing


螺纹 订货号
Thread Order No.

无盖/Without Cover

JBSDC48B-OB-1L

带塑料盖/With plastic Cover¹⁾

JBSDC48B-OB-1L-C



无盖/Without Cover

2M32	JBSDC48B-CB-1L-2M32
M40	JBSDC48B-CB-1L-M40
2M40	JBSDC48B-CB-1L-2M40
M50	JBSDC48B-CB-1L-M40
2M50	JBSDC48B-CB-1L-2M40
PG29	JBSDC48B-CB-1L-PG29
2PG29	JBSDC48B-CB-1L-2PG29
PG36	JBSDC48B-CB-1L-PG36
2PG36	JBSDC48B-CB-1L-2PG36

带塑料盖/With plastic Cover¹⁾

2M32	JBSDC48B-CB-1L-C-2M32
M40	JBSDC48B-CB-1L-C-M40
2M40	JBSDC48B-CB-1L-C-2M40
M50	JBSDC48B-CB-1L-C-M40
2M50	JBSDC48B-CB-1L-C-2M40
PG29	JBSDC48B-CB-1L-C-PG29
2PG29	JBSDC48B-CB-1L-C-2PG29
PG36	JBSDC48B-CB-1L-C-PG36
2PG36	JBSDC48B-CB-1L-C-2PG36

螺丝连接/Screw connection



插芯/Insert



JBSDC06M




JBSDC06F

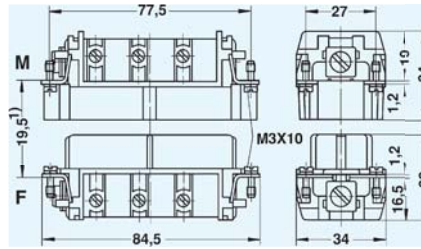

M

F



ngs

1)接插体之间最大距离21mm
Distance for contact max.21mm

接插针排序
Contacts arrangement view
from termination side

面板安装开孔图
Panel cut out for inserts
for use without Hoods/housi

2耳上壳、1扣下壳/Hoods with 2bolts & Housings with 1lever

上壳 Hood	螺纹 Thread	订货号 Order No.
	M25	JBSDC06H-SE-2B-M25
	M32	JBSDC06H-SE-2B-M32
	PG21	JBSDC06H-SE-2B-PG21
	PG29	JBSDC06H-SE-2B-PG29

4耳上壳、2扣下壳/Hoods with 4bolts & Housings with 2levers

上壳 Hood	螺纹 Thread	订货号 Order No.
	M25	JBSDC06H-SE-4B-M25
	M32	JBSDC06H-SE-4B-M32
	PG21	JBSDC06H-SE-4B-PG21
	PG29	JBSDC06H-SE-4B-PG29

2扣上壳、4耳下壳/Hoods with 2levers & Housings with 4bolts

上壳 Hood	螺纹 Thread	订货号 Order No.
	M25	JBSDC06H-SE-2L-M25
	M32	JBSDC06H-SE-2L-M32
	PG21	JBSDC06H-SE-2L-PG21
	PG29	JBSDC06H-SE-2L-PG29

	M25	JBSDC06H-TE-2B-M25
	PG21	JBSDC06H-TE-2B-PG21
	PG29	JBSDC06H-TE-2B-PG29

	M25	JBSDC06H-TE-4B-M25
	PG21	JBSDC06H-TE-4B-PG21
	PG29	JBSDC06H-TE-4B-PG29

	M25	JBSDC06H-TE-2L-M25
	PG21	JBSDC06H-TE-2L-PG21
	PG29	JBSDC06H-TE-2L-PG29

下壳 Housing	螺纹 Thread	订货号 Order No.
	无盖/Without Cover	JBSDC06B-OB-1L
	带塑料盖/With plastic Cover ¹⁾	JBSDC06B-OB-1L-C

	无盖/Without Cover	M25 JBSDC06B-CB-1L-M25
		2M25 JBSDC06B-CB-1L-2M25
		PG21 JBSDC06B-CB-1L-PG21
		2PG21 JBSDC06B-CB-1L-2PG21
	带塑料盖/With plastic Cover ¹⁾	M25 JBSDC06B-CB-1L-C-M25
		2M25 JBSDC06B-CB-1L-C-2M25
		PG21 JBSDC06B-CB-1L-C-PG21
		2PG21 JBSDC06B-CB-1L-C-2PG21

下壳 Housing	螺纹 Thread	订货号 Order No.
	无盖/Without Cover	JBSDC06B-OB-2L

	无盖/Without Cover	M25 JBSDC06B-CB-2L-M25
		2M25 JBSDC06B-CB-2L-2M25
		PG21 JBSDC06B-CB-2L-PG21
		2PG21 JBSDC06B-CB-2L-2PG21

	无盖/Without Cover	M25 JBSDC06B-TE-2L-M25
		PG21 JBSDC06B-TE-2L-PG21
		PG29 JBSDC06B-TE-2L-PG29

	无盖/Without Cover	M25 JBSDC06B-TE-1L-M25
		PG21 JBSDC06B-TE-1L-PG21
		PG29 JBSDC06B-TE-1L-PG29

下壳 Housing	螺纹 Thread	订货号 Order No.
	无盖/Without Cover	JBSDC06B-OB-4B
	带塑料盖/With plastic Cover ¹⁾	JBSDC06B-OB-4B-C


	无盖/Without Cover	M25 JBSDC06B-CB-4B-M25
		2M25 JBSDC06B-CB-4B-2M25
		PG21 JBSDC06B-CB-4B-PG21
		2PG21 JBSDC06B-CB-4B-2PG21
	带塑料盖/With plastic Cover ¹⁾	M25 JBSDC06B-CB-4B-C-M25
		2M25 JBSDC06B-CB-4B-C-2M25
		PG21 JBSDC06B-CB-4B-C-PG21
		2PG21 JBSDC06B-CB-4B-C-2PG21




JBSDC12M




JBSDC12F

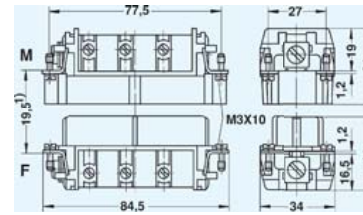

1) 接插体之间最大距离21mm
Distance for contact max.21mm




接插针排序
Contacts arrangement view
from termination side




面板安装开孔图
Panel cut out for inserts
for use without Hoods/housings

2耳上壳、1扣下壳/Hoods with 2bolts & Housings with 1lever

上壳 Hood	螺纹 Thread	订货号 Order No.
------------	--------------	------------------




M32 JBSDC12H-SE-2B-M32
PG29 JBSDC12H-SE-2B-PG29



M32 JBSDC12H-TE-2B-M32
M40 JBSDC12H-TE-2B-M40
M50 JBSDC12H-TE-2B-M50
PG29 JBSDC12H-TE-2B-PG29
PG36 JBSDC12H-TE-2B-PG36

下壳 Housing	螺纹 Thread	订货号 Order No.
---------------	--------------	------------------




无盖/Without Cover

JBSDC12B-OB-1L

带塑料盖/With plastic Cover¹⁾

JBSDC12B-OB-1L-C



无盖/Without Cover


M32 JBSDC12B-CB-1L-M32
2M32 JBSDC12B-CB-1L-2M32
M40 JBSDC12B-CB-1L-M40
2M40 JBSDC12B-CB-1L-2M40
PG29 JBSDC12B-CB-1L-PG29
2PG29 JBSDC12B-CB-1L-2PG29
PG36 JBSDC12B-CB-1L-PG36
2PG36 JBSDC12B-CB-1L-2PG36

带塑料盖/With plastic Cover¹⁾


M32 JBSDC12B-CB-1L-C-M32
2M32 JBSDC12B-CB-1L-C-2M32
M40 JBSDC12B-CB-1L-C-M40
2M40 JBSDC12B-CB-1L-C-2M40
PG29 JBSDC12B-CB-1L-C-PG29
2PG29 JBSDC12B-CB-1L-C-2PG29
PG36 JBSDC12B-CB-1L-C-PG36
2PG36 JBSDC12B-CB-1L-C-2PG36

4耳上壳、2扣下壳/Hoods with 4bolts & Housings with 2levers

上壳 Hood	螺纹 Thread	订货号 Order No.
------------	--------------	------------------




M32 JBSDC12H-SE-4B-M32
M40 JBSDC12H-SE-4B-M40
PG29 JBSDC12H-SE-4B-PG29
PG36 JBSDC12H-SE-4B-PG36




M32 JBSDC12H-TE-4B-M32
M40 JBSDC12H-TE-4B-M40
M50 JBSDC12H-TE-4B-M50
PG29 JBSDC12H-TE-4B-PG29
PG36 JBSDC12H-TE-4B-PG36


下壳 Housing	螺纹 Thread	订货号 Order No.
---------------	--------------	------------------



JBSDC12B-OB-2L



M32 JBSDC12B-CB-2L-M32
2M32 JBSDC12B-CB-2L-2M32
M40 JBSDC12B-CB-2L-M40
2M40 JBSDC12B-CB-2L-2M40
PG29 JBSDC12B-CB-2L-PG29
2PG29 JBSDC12B-CB-2L-2PG29
PG36 JBSDC12B-CB-2L-PG36
2PG36 JBSDC12B-CB-2L-2PG36



M32 JBSDC12B-TE-2L-M32
M40 JBSDC12B-TE-2L-M40
M50 JBSDC12B-TE-2L-M50
PG29 JBSDC12B-TE-2L-PG29
PG36 JBSDC12B-TE-2L-PG36